

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
2 June 2005 (02.06.2005)

PCT

(10) International Publication Number
WO 2005/050152 A1

(51) International Patent Classification⁷: **G01K 13/00**,
1/08

[AT/AT]; Oberfresch 15, A-6800 Feldkirch (AT). UWE,
Diegel [DE/FR]; Microlife France, 27, rue Taitbout,
F-75009 Paris (FR).

(21) International Application Number:
PCT/EP2004/012169

(74) Agents: **HEPP, Dieter** et al.; Hepp Wenger Ryffel AG,
Friedtalweg 5, CH-9500 Wil (CH).

(22) International Filing Date: 28 October 2004 (28.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03024859.5 31 October 2003 (31.10.2003) EP

(71) Applicant (for all designated States except US): **MI-
CROLIFE INTELLECTUAL PROPERTY GMBH**
[CH/CH]; Max Schmidheiny-Strasse 201, CH-9435 Heer-
brugg (CH).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (for US only): **FRICK, Gerhard**

[Continued on next page]

(54) Title: THERMOMETER WITH TWO OPERATING MODES, DEVICE FOR RESETTING A THERMOMETER, SYSTEM COMPRISING A THERMOMETER AND A RESETTING DEVICE AND A METHOD FOR RESETTING A THERMOMETER

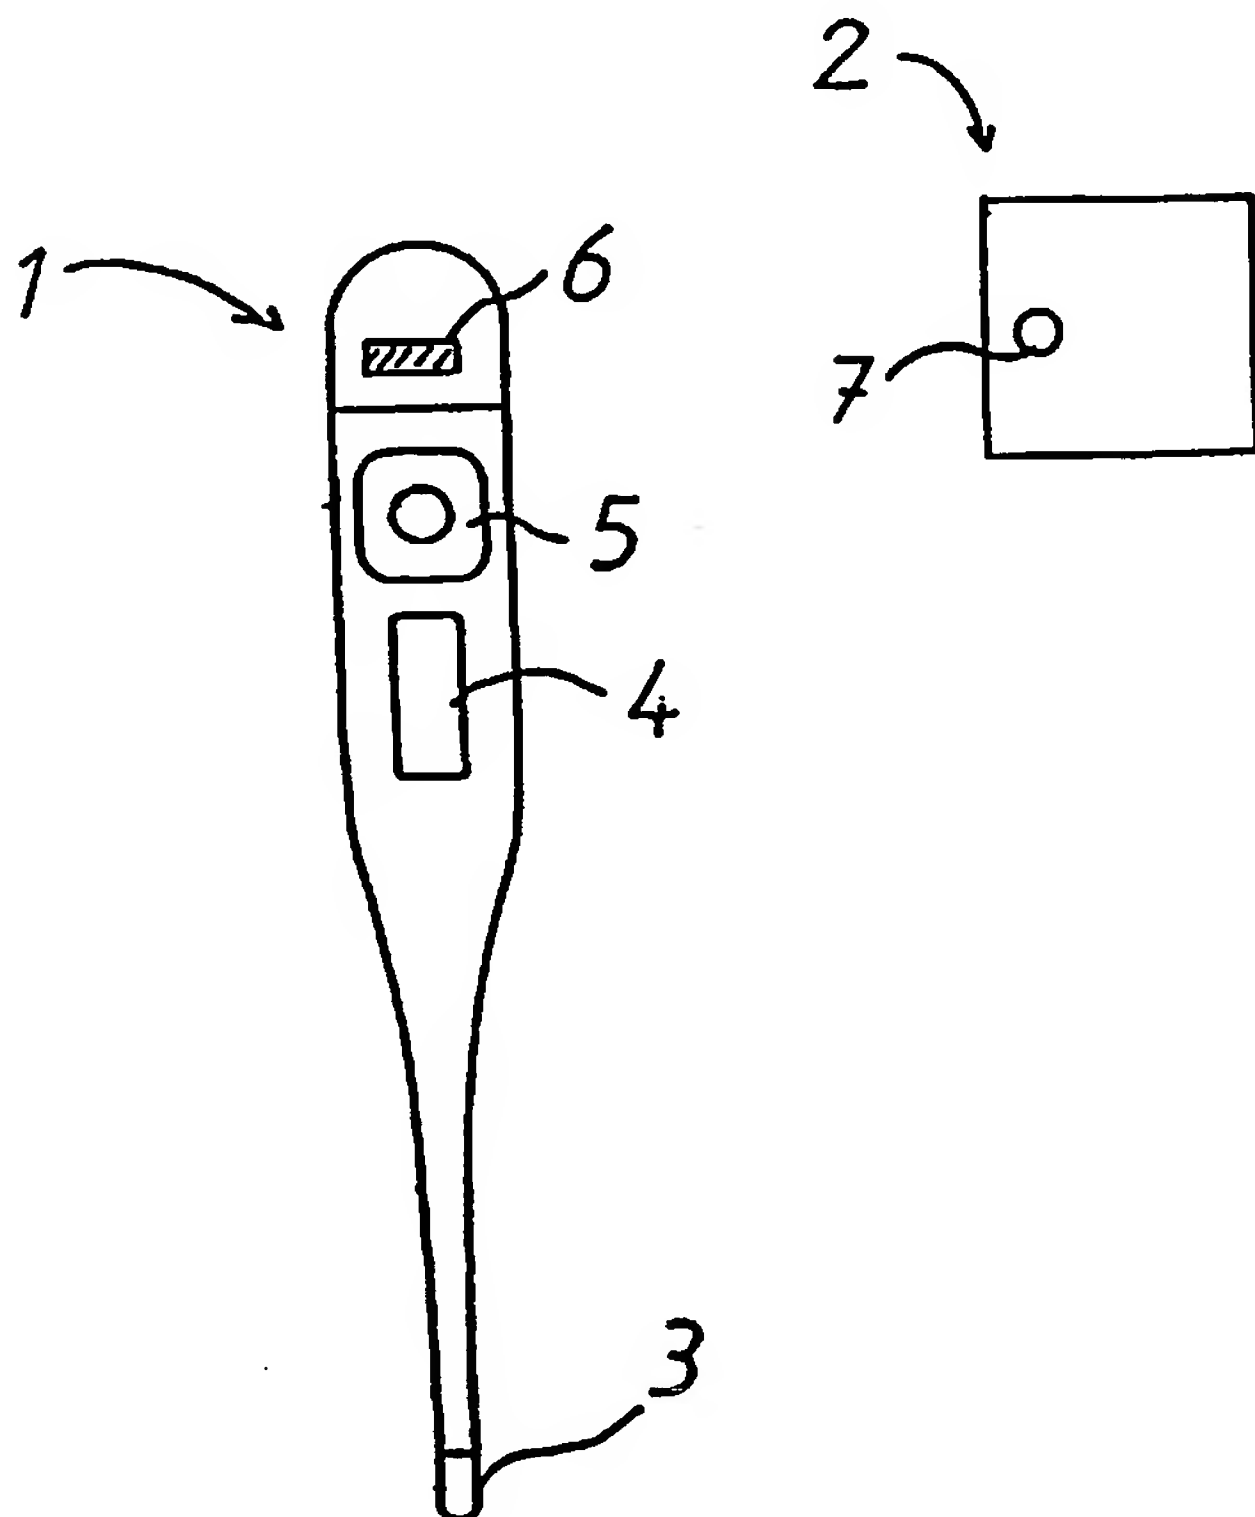

(57) Abstract: The invention relates to a system compris-
ing a digital medical thermometer (1) and a device (2) for
resetting said thermometer (1). Said thermometer (1) has
at least two operating modes, a first operational mode and
a second non-operational mode. Further it comprises a re-
ceiver unit (6) adapted for receiving a reset signal and an
electrical controlling unit. This controlling unit has means
for setting the thermometer (1) into the second non-oper-
ational mode after a temperature measurement, means for
identifying the reset signal and means for resetting the ther-
mometer (1) into the first operational mode when said signal
fulfils a predetermined criterion. The device (2) for resetting
the thermometer (1) into the operational mode has a trans-
mitter (7) to send a signal to the thermometer (1). The re-
ceiver unit (6) of the thermometer (1) is adapted to receive
the signal of the transmitter (7).



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*